



Data Sheet CODESYS HMI SL

This product allows for the creation of operating interfaces with CODESYS visualization for an HMI device (PC or panel), with data from CODESYS V2, CODESYS V3 and OPC UA controllers. The visualization is created with the CODESYS Development System (V3), the free IEC 61131-3 development system with a full-fledged visualization editor.

Product description

Licensing:

Single Device License



CODESYS HMI SL is a software package that is installed on a remote computer to equip it with a graphical user interface (HMI). This new HMI support allows it to combine and visualize the data of one or more CODESYS V2 and CODESYS V3 controllers (data sources) on one remote HMI device. Since CODESYS V3.5 SP17 controllers with an OPC UA Server can also be visualized. A new datasource with OPC UA Client functionality is provided. The HMI SL can also be operated in conjunction with redundancy. An additional redundancy license is required for this.

Benefits

- Integrated into the CODESYS Development System – for development of the remote HMI
- Development in one project, either independently or with the PLC application
- Scalable projects by unlocking any number of available data points
- Simplified creation of the application by guided project configuration
- Automated display of all available data in the controller network
- Display of all functions and elements that are available with CODESYS Visualization, for example:
 - Alarm management
 - Trace and trend display
 - User management
 - Recipe management
 - Visualization styles
- Download the visualization directly from the development environment to the HMI device

The following functions are available with the CODESYS HMI SL basic license: * 10,000 data source points for linking CODESYS V2 and CODESYS V3 data * 100 data server points for switching the data server product * Symbolic or direct data linking * Processing (read/write) of variable and recipe data * Display of the contents of alarm tables and trend records * Customization of the sampling rate of the visualization to the task cycle of the controller(s) * Automatic management and generation of the required data types and data points * Automatic conversion function for data server projects

Specialized HMI perspectives with typical perspectives – can be switched at any time for application developers

Integrated visualization editor

Extensive library with ready-made elements

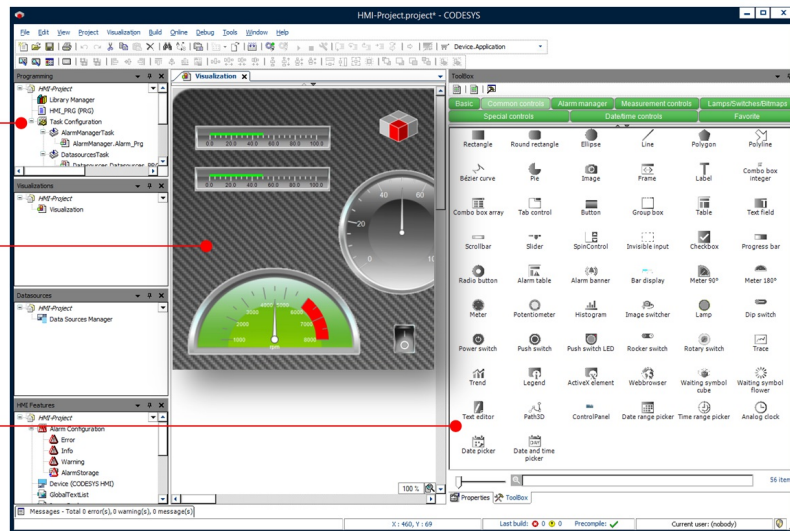


Bild 1: Programming the CODESYS HMI within the CODESYS Development System

Working with data points and data sources of any CODESYS controller

Local variable	Access Right	Update always	Create or map	Mapping type	Remote variable
Application				...	Application
PLC_PRG				...	PLC_PRG
arr2				...	arr2
arr		<input checked="" type="checkbox"/>		...	arr
arrArr1				...	arrArr1
arrArrStruct				...	arrArrStruct
[0]				...	[0]
[1]				...	[1]
[0]				...	[0]
a1				INT	a1
b1		<input checked="" type="checkbox"/>		INT	b1
c1				REAL	c1
arrStruct				...	arrStruct
inst1				...	inst1
inst2				...	inst2
inst3				...	inst3
inst4				...	inst4
inst5				...	inst5
a1				INT	a1

Bild 2: Working with data points and data sources

Nominal

- Extension license for supporting an unlimited number of data points

Functional

- CODESYS WebVisu SL – a CODESYS Store product

General information

Supplier:

CODESYS GmbH
 Memminger Strasse 151
 87439 Kempten
 Germany

Support:

<https://support.codesys.com>

This product includes a CODESYS Support Ticket, i.e. 1 hour of support of CODESYS. More details can be found in the CODESYS Store product: [CODESYS Support Ticket](#).

Item:

CODESYS HMI SL

Item number:

2304000009

Sales:


CODESYS Store

<https://store.codesys.com>

Included in delivery:

- Package for the CODESYS Development System including CODESYS Control, license agreement, online help and device description
- License Key

System requirements and restrictions

Programming System	CODESYS Development System V3.5.10.0 or higher
Runtime System	-
Supported Platforms/ Devices	Executable under Windows 8 / 10 / Embedded (32 / 64 Bit) The versions maintained by Microsoft are supported. Note: Use the project "Device Reader" to find out the supported features of your device. "Device Reader" is available for free in the CODESYS Store.
Additional Requirements	See license agreement. After installation, the user is responsible for implementing and checking the functionality of the combination of the software package and hardware according to device specifications. Runtime with Datasource Manager
Restrictions	-
Licensing	<div style="text-align: center;">  DEVICE </div> <p>Single Device License: The license can be used on the target device/PLC on which the CODESYS Runtime System is installed.</p> <p>Licenses are activated on a software-based license container (soft container), which is permanently connected to the controller. Alternatively the license can be stored on a CODESYS Key (USB-Dongle). By replugging the CODESYS Key, the license can be used on any other controller</p> <p>Note: In demo mode, the software runs for two hours without a license. After that, a manual restart is required.</p>
Required Accessories	Optional: CODESYS Key

Note: Not all CODESYS features are available in all territories. For more information on geographic restrictions, please contact sales@codesys.com.

Note: Technical specifications are subject to change. Errors and omissions excepted. The content of the

current online version of this document applies.